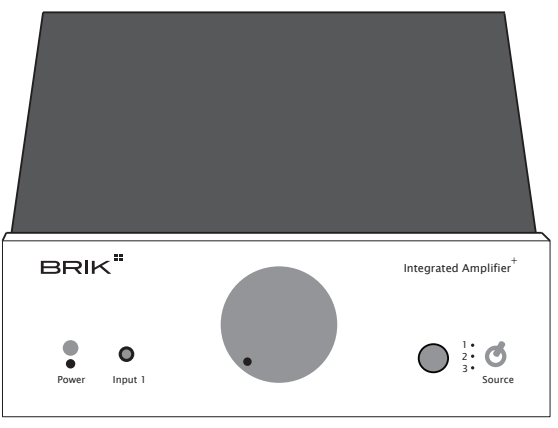

Integrated Amplifier Plus
User Manual

Dear User,
Thank you for purchasing BRIK **Integrated Amplifier Plus**.
Please read this User Manual before operating the machine to ensure its best performance and your safety.

Instructions:

Connecting Source
▪ Connect D/A Converter, Bluetooth Stage, Internet Radio, Phono Stage, CD Player, Mobile Phone, or other line level sources through **Input 1** (3.5mm jack) on the front panel or **Input 2** or **3** on the rear panel.

Connecting Speaker
▪ Connect speaker cables with 4mm diameter Banana plug, spade connector, or naked wire.
▪ Highly recommend connecting speakers with 4 ohm and 100 watts output.

Connecting Power
▪ This unit is supplied with a power supply suitable for your country's mains supply. Check the label before connecting to ensure compliance with the mains rating in your house. Connect the low voltage plug from the power supply to the **20V In** socket before connecting the power supply to the mains, and then press Power button on the front panel to turn on the machine.

Choosing Source
▪ Use the switch on the front panel to choose the music source.

Remote Controller
▪ Please load battery in controller, press ⏻ to turn on controller and press "AMP" key to execute volume control. Kindly aim on sensor of front panel to control volume accordingly.

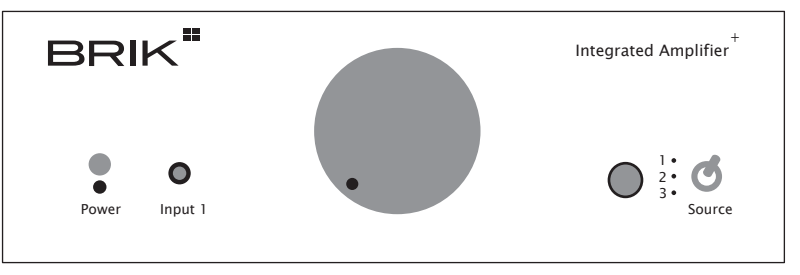

Specifications:

INPUT OPTION	RCA Line Input x 2 3.5 φ Line Input x 1
POWER OUTPUT(4OHM LOAD)	> 20 W (1KHz THD 0.5 %) > 35 W (THD 10 % Max Output)
INPUT SENSITIVITY	210 mV
INPUT IMPEDANCE	20K OHM
DISTORTION	< 0.5 % (1KHz 1W / 4 OHM 20Hz ~ 20K Hz)
FREQUENCY RESPONSE	20 ~ 20K Hz (Volume at Max 1W Output -3dB)
SEPARATION	> 60 dB
MIN. HUM VOLUME AT MIN.	< 10 mV (20K LPF)
S/N	> 75 dB (20K LPF)
DIMENSION	W 140 x H 48 x D160 mm
WEIGHT	1100 g

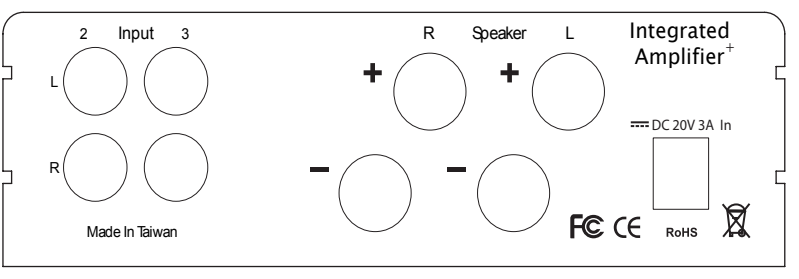

BRIK

WWW.BRIK-AUDIO.COM

CE RoHS FC

The information was correct at the time of going to press. The manufacturer reserves the rights to make changes to the technical specification without prior notice.

The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons releases the manufacturer from any liability over and above the lawful rights of the customer.

©BRIK 2012